
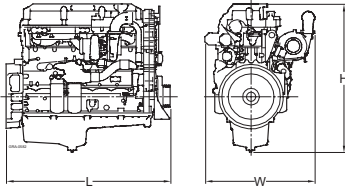


Industrial

Series 60 - 12.7 lit.

for C & I and Mining Application

EPA Tier 2 compliant / EU Stage II compliant

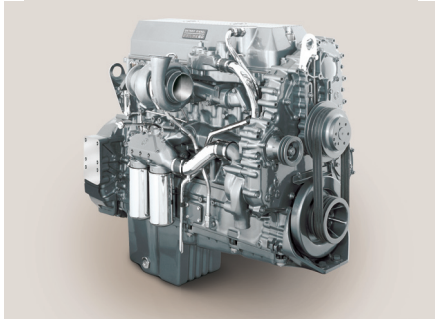

Dimensions and Masses

Engine	Dimensions LxWxH mm (in)	Mass, dry kg (lbs)
S60	1455x925x1380 (57x36x54)	1290 (2844)

All dimensions are approximate, for complete information refer to the installation drawing.

Engine Model		
Bore/stroke	mm (in)	130/160 (5.1/6.3)
Cylinder configuration		6 cyl./In-line
Displacement/cylinder	l (cu in)	2.12 (129)
Displacement, total	l (cu in)	12.7 (775)
Description		Exhaust turbocharging, Charge-air cooling, High-pressure injection system with solenoid-controlled unit injection pumps, Electronic engine management

Engine type	Reference No.	Rated Power ICFN			Peak Torque		
		kW	bhp	rpm	Nm	lb-ft	rpm
Application		Heavy duty operation (5A)					
S60	6063MK33-7569	224	300	2100	1424	1050	1350
	6063MK33-7368	242	325	2100	1559	1150	1350
	6063MK33-7367	261	350	2100	1831	1350	1350
	6063MK33-7366	280	375	2100	1831	1350	1350
	6063MK33-7365	298	400	2100	1896	1400	1350
	6063MK33-7360	298	400	2200	1830	1350	1350

EPA: Exhaust emission EPA 40 CFR 89/Tier 2 compliant
 EU: Exhaust emission EU 97/68 EC/Stage II compliant



Power. Passion. Partnership.

Engine type	Reference No.	Rated Power ICFN			Peak Torque		
		kW	bhp	rpm	Nm	lb-ft	rpm
Application		Medium duty operation (5B)					
S60	6063MK33-7364	317	425	2100	2000	1475	1350
	6063MK33-7359	332	445	2200	2000	1475	1350
	6063MK33-7363	336	450	2100	2102	1550	1350
	6063MK33-7562	354	475	2100	2102	1550	1350
Application		Short-time duty operation (5C)					
S60	6063MK33-7361	373	500	2100	2102	1550	1350
	6063MK33-7358	373	500	2300	2237	1650	1350

EPA: Exhaust emission EPA 40 CFR 89/Tier 2 compliant
 EU: Exhaust emission EU 97/68 EC/Stage II compliant

Application	Power definition	
5A	Continuous operation w/100% load	Load factor: $\geq 60\%$, Operating hours: unrestricted, Overload: Fuel stop (ICFN)
5B	Continuous operation w/variable load	Load factor: $< 60\%$, Operating hours: unrestricted, Overload: Fuel stop (ICFN)
5C	Short-time operation w/variable load	Load factor: $< 75\%$, Operating hours: max. 1000 p/y, Overload: Fuel stop (ICFN)

Power output within 5% tolerance at standard conditions. Power definition according to ISO 3046 (ratings also correspond to SAE J 1995 and SAE J 1349 standard conditions)
 Consult your MTU distributor/dealer for the rating that will apply to your specific application.

Standard Equipment	
Starting System	Electric starter 12 V, Alternator 28 VDC/70 amp, belt driven
Fuel Oil System	Fuel main filter and pre-filter, Electronic unit injection system
Lube Oil System	Lube oil filter
Combustion Air System	Set of dry-type airfilter with contamination indicator
Exhaust Gas System	Turbocharger outlet connection and clamp
Coolant System	Radiator-cooler with mechanically driven fan for engines with air charge air cooling, with connecting parts for engine coolant circuit designed for 100% engine power, cooling air pressure loss 200 Pa, 40°C/104°F ambient air temp.
Flywheel/Housing	Cast iron flywheel housing
Engine Mounting	Resilient

Optional Equipment	
Starting System	Electric starter 24 V
Fuel Oil System	Electrical preheating unit
Flywheel/Housing	Flexplate for Allison transmission
Accessory Drives	One accessory drive for front or rear mounts
Certification	EPA, EU and MSHA/Canmet nonroad certification

Reference conditions:

> Intake-air temperature: 25°C (77°F) > Ambient air pressure: 1000 mbar > Altitude above sea level: 100 m (328 ft)

Subject to change without notice. Customization possible. Engines illustrated in this document may feature options not fitted as standard to standard engine.